# INSTALLATION INSTRUCTIONS

07/27/2007

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**MOUNTING THE FIXTURE (Fig. 1)**

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the Circular Strap (A) to the Junction Box with the two Junction box Screws (B) as shown. The side of the Circular Strap marked “GND” must face out.
4. Thread the Studs (C) into the pre-drilled holes of the Circular Strap (A) space the same distance apart as the hole in the Canopy (D).

**CONNECTING THE WIRES (Fig. 2)**

5. Connect the fixture wires to the junction box wires as shown in the wiring diagram. Making sure all wire connectors are secured and do not easily pull off with a slight tug. If there is no Green Ground wire from the junction box, connect the Fixture Ground Wire to the Circular Strap with the green Screw provided.

**COMPLETING THE INSTALLATION (Fig. 1)**

6. Thread Canopy (D) onto Studs (C) and secure with Knurled Knobs (E).
7. Place the Glass Shade (G) and Metal Tube (H) over the socket (F), fasten with Screw Shell (I) by using the Spanner (J) provided.
8. Install the light bulb in accordance with the fixture’s specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**

   Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig. 1**

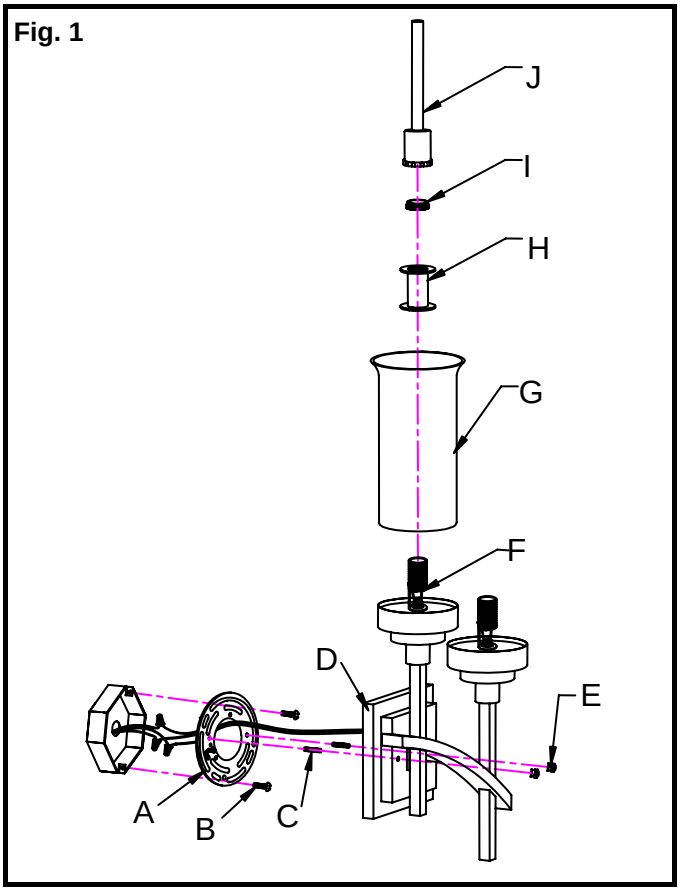


**Fig. 2**

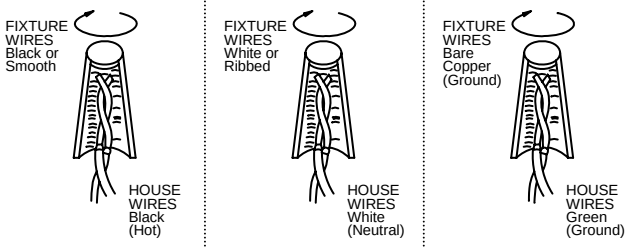
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green (Ground)

In the event that you should have any installation question or are missing parts, please contact **Customer Service**. Customer service may be reached weekdays a ***1-800-527-0998*** between the hours of 8:00am and 5:00pm PST (Pacific Standard Time).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-1170E/S

# INSTRUCCIONES PARA LA INSTALACION

07/27/2007

**ADVERTENCIA! CORTE LA CORRIENTE DESDE EL FUSIBLE O EL INTERRUPTOR CENTRAL**

**PREPARACION (Fig. 1)**

1. Corte la corriente en el circuito principal y quite la lampara vieja incluyendo la barra transversal.
2. Desempaque cuidadosamente su nueva lampara y coloque todas las partes en una superfice despejada.Tenga cuidado de no perder las partes pequeñas que son necesarias para la instalacion.
3. Una la Abrazadera Circular (A) a la caja de union con los dos tornillos de la caja de union (B) como se muestra en la. El lado marcado “GND” deben quedar hacia afuera..
4. Atornille los Tachones (C) en los agujeros de la Abrazadera Circular (A), separados en la misma distancia que los agujeros del la Cubierta (D)

**CONECTANDO LOS ALAMBRES (Fig. 2)**

5. Conecte los alambres de la lampara a los alambres de la caja de union como se muestra en el diagrama de eldctricidad.Asegurese que todas las conecciones de los alambres esten firmes y que no se suelten con un pequeno jalon. Si no hay alambre verde a tierra en la caja de union. Conecte el alambre a tierra de la lampara a la Abrazadera Circular con el tornillo verde que viente con el paquete.

**TERMINANDO LA INSTALACION (Fig. 1)**

6. Pase la cubierta (D) sobre los montantes (C) y apriete con las ruedas dentadas (E).
7. Colocar la Pantalla de Crital (G) y el Tubo de Metal (H) por encima del enchufe (F), ajustar con los tornillos (I) usando la Llave de Tuercas (J) proporcionada.
8. Instale los focos de acuerdo a las especificaciones. **(NO EXCEDA MAS DE LOS VATIOS ESPECIFICADOS!)**

Su instalacion a terminado, conecte la corriente electrica y pruebe la lampara.

**<u>Nota:</u> La ilustracion (Fig. 1) en este manual esta para el propositos de la instalacion solamente. Puede o no puede ser identical al accesorio comprador.**

**Fig. 1**

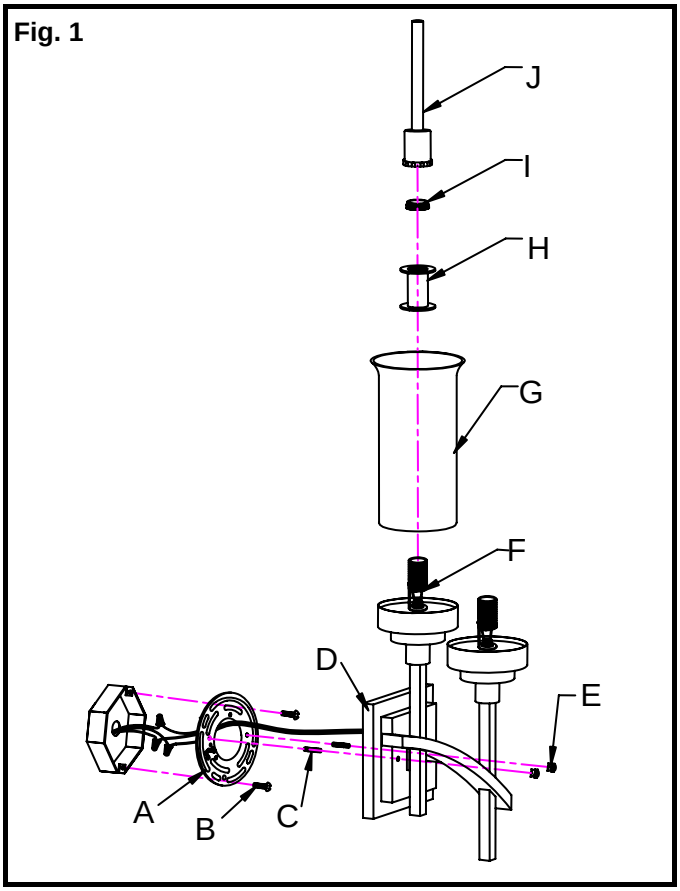


**Fig. 2**

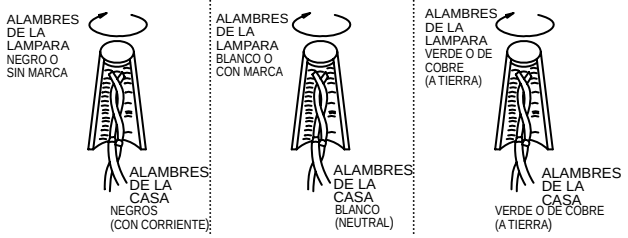
ALAMBRES DE LA LAMPARA NEGRO O SIN MARCA
ALAMBRES DE LA CASA NEGROS (CON CORRIENTE)
ALAMBRES DE LA LAMPARA BLANCO O CON MARCA
ALAMBRES DE LA CASA BLANCO (NEUTRAL)
ALAMBRES DE LA LAMPARA VERDE O DE COBRE (A TIERRA)
ALAMBRES DE LA CASA VERDE O DE COBRE (A TIERRA)

En caso de preguntas sobre la instalacion o le faltaron partes, porfavor hablar al departamento de **Servicio al Cliente** al **1-800-527-0998** de Lunes a Viernes de 8:00 a.m. a 5:00 p.m. PST (Tiempo del Pacifico).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339